

03/08/00
Jc759 U.S. PTO

03.09.00

A

THE ASSISTANT COMMISSIONER OF PATENTS
Washington, D.C. 20231

DOCKET NUMBER: RO9-99-187
March 8, 2000

Sir:

Transmitted herewith for filing is the Patent Application of:

Inventor: Thomas H. Tran

For: METHOD AND DATA PROCESSING SYSTEM FOR SOFTWARE TESTING OF A DEVICE DRIVER

Enclosed are:

☒ Patent Specification and Declaration

☒ 6 sheets of drawing(s).

☒ An assignment of the invention to International Business Machines Corporation (includes Recordation Form Cover Sheet).

☐ A certified copy of a ☐ application.

☐ Information Disclosure Statement, PTO 1449 and copies of references.

Jc564 U.S. PTO
09/521275
03/08/00

The filing fee has been calculated as shown below:

For	Number Filed	Number Extra	Rate	Fee
Basic Fee				\$690
Total Claims	29 - 20	9	x 18 =	\$162
Indep. Claims	3 - 3		x 78 =	\$
MULTIPLE DEPENDENT CLAIM PRESENTED			x 270 =	\$
			TOTAL	\$852.00

☒ Please charge IBM Corporation Deposit Account No. 09-0465 in the amount of \$852.00. A duplicate copy of this sheet is enclosed.

☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to IBM Corporation Deposit Account 09-0465. A duplicate copy of this sheet is enclosed.

☒ Any additional filing fees required under 37 CFR §1.16.

☒ Any patent application processing fees under 37 CFR §1.17.

CERTIFICATE OF MAILING BY "EXPRESS MAIL" UNDER 37 CFR § 1.10

"Express Mail" mailing label number EL453464426US

Date of Mailing March 8, 2000

I hereby certify that the documents indicated below are being deposited with the United States Postal Service under 37 CFR 1.10 on the date indicated above and are addressed to Box Patent Applications, Assistant Commissioner of Patents, Washington, D.C. 20231 and mailed on the above Date of Mailing with the above "Express Mail" mailing label number.

Chris Montez

By

ALZ

Steven Lin, Registration No.35,250.
FELSMAN, BRADLEY, VADEN, GUNTER & DILLON,
LLP
Suite 350 Lakewood on the Park
7600B North Capital of Texas Highway
Austin, Texas 78731
Telephone (512) 343-6116

METHOD AND DATA PROCESSING SYSTEM FOR SOFTWARE TESTING OF A DEVICE DRIVER

BACKGROUND OF THE INVENTION

5

1. Technical Field:

10

The present invention relates in general to device drivers and software emulation of hardware devices, and, in particular, to a method and data processing system for testing a device driver entirely in software. Still more particularly, the present invention relates to a method and system for testing a device driver that invoke an exception handler to map a target address range to a data space range of the operating system and to emulate a target hardware device if the target address range is outside of the data space range.

15

20

2. Description of the Related Art:

25

30

With reference now to the figures and in particular with reference to **Figure 1**, there is illustrated a software layer diagram **100** that shows a device driver **108** in relationship to an application program **102**, operating system **104**, and firmware **106** of a data processing system. Firmware **106** is generally the layer interposed between hardware, such as target device **110**, and operating system **104** and interacts with the hardware to perform designated tasks. Application program **102**, in contrast, runs on top of operating system **104** and frequently uses abstract constructs to perform its operations. Application

program 102 often relies upon firmware 106 to accomplish the pragmatic task of controlling the data processing system hardware. When application program 102 is executed, application program 102 calls on firmware 106. Firmware 106, in turn, maps commands of application program 102 to the respective hardware.

Figure 1 shows that device driver 108 is typically part of firmware 106. Device drivers 108 are well known in the art. The development of device driver 108 is straightforward if target device 110 actually exists during or before the time device driver 108 is being developed. Device driver 108 is tested by installing device driver 108 into a data processing system, coupling target device 110 to a data processing system, and running application program 102 under an operating system 104 that requests access to and operation of target device 110. If access to and operation of target device 110 is successful, then device driver 108 has been successfully tested. However, if target device 110 does not exist during or before development of device driver 108, testing of device driver 108 requires simulation of hardware target device 110.

Since a device driver is generally a routine used by an application program 102 to drive hardware target device 110, a conventional device driver usually involves mapping between two sets of commands, a software command set for application program 102 and a hardware command set for target device 110. The software command set

generally includes commands for the software, such as Aload@ and Astore@ commands. The hardware command set generally comprises commands for the hardware, such as Ainport@ and Aoutport@ commands. Also, software commands generally translate over to respective hardware commands. For example, the Aload@ and Astore@ commands for a software program respectively correlate to the Ainport@ and Aoutport@ commands for a hardware device. A memory mapped input/output (IO) architecture has been developed to simplify the command set for a device driver (i.e., simplify the two command sets into one command set). The trend has been to simplify and use memory mapped IO device drivers rather than the conventional device drivers that directly interact with hardware devices.

Memory mapped IO generally involves allocating an address range to one or more IO devices in a data processing system. The address range maps accesses to physical hardware addresses to the allocated address range so that hardware commands are treated as software commands, which are usable by a software or firmware program, such as a device driver. Through use of the memory mapped IO, a software or firmware program, such as a device driver, is able to communicate with the hardware device as though the program were communicating directly with memory.

The use of a software emulator for emulating a target device 110 is known in the prior art. U.S. Patent 5,796,984 to Pearce et al. (APearce@) discloses an example of a software emulator of a peripheral hardware device. The software emulator may be used for testing a device driver based on various reasons, such as hardware costs, hardware availability, etc. A conventional way of

testing a device driver with a software emulator typically involves using an input/output (IO) interrupt handler. The IO interrupt handler involves taking an exception when an access by the device driver is made to the physical hardware device 110 (i.e., a hardware command is executed by the device driver). Control and access by the device driver is, in effect, re-directed to the software emulator, and the software emulator emulates the behavior of the hardware device 110. Pearce provides an example of using an IO interrupt handler for testing a device driver. Since memory mapped IO device drivers do not attempt direct access and control of hardware device 110 (i.e., do not execute hardware commands), then use of an IO interrupt handler to test a memory mapped device driver would not work.

Without the use of an interrupt or exception handler, re-directing of the accesses by a memory mapped IO device driver (i.e., re-directing software commands, such as load and store commands) cannot be accomplished. When the memory mapped IO device driver performs such accesses (i.e., executes software commands), the memory mapped IO device driver, having not been re-directed, may seek to access memory addresses outside the data address space defined by operating system 104 with which the device driver is being executed. Attempts to read from or write to these memory addresses could have potentially disastrous consequences and would therefore be prohibited by operating system 104. Thus, the memory addresses will have a completely different context when device driver 108 is executed with the operating system 104. One possible solution to this problem is to manually modify the code to change all of the addresses so that the

addresses are mapped to addresses within the data address space of operating system **104**. However, the modification of code and all addresses within the code would be an extremely tedious and time-consuming process and would require the changing of a significantly large number of lines of code. Therefore, testing of a memory mapped IO device driver is presently impossible or very impractical.

SUMMARY OF THE INVENTION

A system and method are disclosed for testing a device driver on a data processing system. An operating system allocates a memory address range for executing a device driver. The device driver is executed as an application on top of the operating system to test the device driver. The system and method monitor to detect whether a target address for a request made by the device driver is within the memory address range. In response to detecting the target address for the request being made outside of the memory address range, the target address is trapped, and a data exception handler is executed to emulate a target device.

The above as well as additional objects, features, and advantages of the present invention will become apparent in the following detailed written description.

BRIEF DESCRIPTION OF THE DRAWINGS

The novel features believed characteristic of the invention are set forth in the appended claims. The invention itself however, as well as a preferred mode of use, further objects and advantages thereof, will best be understood by reference to the following detailed description of an illustrative embodiment when read in conjunction with the accompanying drawings, wherein:

Figure 1 is a general software layer diagram in accordance to the prior art illustrating a conventional device driver in relationship to the applications, operating system, firmware, and hardware target device;

Figure 2 is a block diagram of an exemplary data processing hardware system for implementing the system and method of the present invention;

Figure 3 is a software layer diagram in accordance to the present invention illustrating the device driver as an application in relationship to the applications, operating system, firmware, and hardware devices;

Figure 4 is a block diagram that illustrates a typical memory map;

Figure 5 is a flow chart of an exemplary method for implementing the present invention;

Figure 6 is a block diagram illustrating more specific method steps for setting up an operating system; and

Figure 7 is a flow chart of an exemplary data exception handler for implementing the present invention.

FIG. 7 is a flow chart of an exemplary data exception handler for implementing the present invention.

DETAILED DESCRIPTION OF ILLUSTRATIVE EMBODIMENT

5 A method and system are disclosed for testing a device driver that invoke a data exception handler to simulate the operation of a target device. The data exception handler emulates the target hardware device if a memory request address is outside of an allocated data space range.

10 With reference now to **Figure 2**, there is shown an overall exemplary block diagram of a data processing system **10** for implementing the present invention. As shown, a central processing unit (CPU) **12**, read only memory (ROM) **13**, and a Dynamic Random Access Memory (DRAM) **14** are connected to a system bus **11** of computer system **10**. CPU **12**, ROM **13**, and DRAM **14** are also coupled to a PCI local bus **20** of computer system **10** through a PCI host bridge **15**. PCI host bridge **15** provides a low latency path through which processor **12** may directly access PCI devices mapped anywhere within bus memory and/or I/O address spaces. PCI host bridge **15** also provides a high bandwidth path allowing PCI devices to directly access DRAM **14**. In addition, an audio adapter **23** may be attached to PCI local bus **20** for controlling audio output through speaker **24**. A graphics adapter **21** may be attached to PCI local bus **20** for controlling visual output through display monitor **22**. Also attached to PCI local bus **20** is a local-area-network (LAN) interface adapter **16**. LAN interface adapter **16** is for connecting computer system **10** to a local-area network (LAN) **17**. A PCI-to-ISA bus bridge, such as an expansion

bus bridge 45, may be utilized for coupling an ISA bus 25 to PCI local bus 20. As shown, a keyboard 26, a microphone 27, a mouse 28, and a hard disk driver 29 may be attached to ISA bus 25 for performing certain basic I/O functions. Although the illustrated exemplary embodiment describes a PCI local bus 20 and an ISA bus 25, the present invention is not limited to these particular bus architectures. Rather, the present invention can be utilized in any bus system having other different bus architectures.

Referring now to **Figure 3**, a software layer diagram 200 for illustrating the general topology of the present invention is shown. Software layer diagram 200 shows device driver 208 as an application 214 and further shows application 214 in relationship to application layer 202, operating system layer 204, firmware layer 206, hardware target device 210, memory mapped IO 216, and random access memory (RAM) device 218, which may be DRAM 14 of **Figure 2**. Device driver 208 is shown at firmware layer 206. Typically, an application program at application layer 202 may issue a request targeting hardware target device 210. Operating system at operating system layer 204 handles the application requests. When the request is issued, the operating system directs device driver 208 to execute and communicate with RAM 218 as though device driver 208 were communicating directly to hardware target device 210. RAM device 218 is mapped to hardware target device 210 via memory mapped input/output (IO) 216.

However, in the present invention, device driver 208 is run as application 214 to test device driver 208. If hardware target device 210 exists, then hardware target device 210 is used for testing device driver application 214. Application 214 is executed on top of the operating system at operating system layer 204. When, during execution of application 214, a request targeting hardware device 210 is issued, the operating system at layer 204 handles the request to access hardware target device 210 via memory mapped IO 216. Memory mapped IO 216 maps an address in RAM 218 that represents hardware target device 210 to the corresponding physical address for hardware target device 210. On the other hand, if hardware target device 210 does not exist, then any request targeting hardware device 210 via memory mapped IO 216 during execution of application 214 is to be re-routed by the operating system to a software emulator of target device 210. In this case, a data exception is taken by the operating system at layer 204 when the request targeting hardware target device 210 through memory mapped IO 216 is issued, and the operating system re-routes the request to data exception handler 212. Data exception handler 212, which is shown at operating system layer 204, handles the request. After the data exception is taken and the request is re-routed to data exception handler 212, data exception handler 212 emulates the behavior of hardware target device 210. The present invention may be used with any suitable operating system 204, such as AIX, Windows NT, LINUX, UNIX, etc.

With reference now to **Figure 4**, a block diagram that illustrates a typical memory map **400** is shown. Memory map **400** is shown to have an input/output (IO) space **402** and a typical program process space **404** for the operating system (such as AIX, Windows NT, LINUX, UNIX, etc.). Data stored in IO space **402** generally map memory mapped IO addresses (i.e., RAM addresses) to physical hardware locations. The operating system allocates program process space **404** as a memory address range for executing applications, including application **214**. Program process space **404** comprises code space **406**, which contain the instructions for various applications or programs. As shown, code space **406** in memory map **400** is defined as the range of addresses between A2000 0000@ and A2F00 0000@. Memory map **400** also comprises data space **408**, which contain the data for various applications or programs. Data space **408** is defined as the range of addresses between A3000 0000@ and A3F00 0000@.

Without memory map **400**, application **214** would issue a request for a data memory address (i.e., 1F00 0000) that is at a physical hardware location, and operating system **204** would terminate application **214** since the address is outside data space **408** (i.e., A30000 0000 and 3F00 0000"). However, with the use of memory map **400**, the request is able to be directed to the location of physical hardware target device **210** by using memory mapping IO data in IO space **402**. However, if such hardware target device **210** does not exist, then an exception needs to be taken by the operating system to re-direct the request to a software emulator of target

device **210**. The present invention provides a memory mapped IO exception handler (i.e., a data exception handler) that is invoked to handle the request and acts as the software emulator to emulate target device **210**.

5 The present invention operates on the premise that requests for a hardware target device **210** are only for addresses that are outside of data space **408**. A determination is made as to whether requests for a hardware target device **210** by application **214** are for
10 addresses outside of data space **408**. The requests for addresses outside of the data space **408** are then re-routed to the memory mapped IO exception handler (i.e., the data exception handler). The memory mapped IO exception handler handles the requests and emulates the
15 behavior of hardware target device **210**.

With reference now to **Figures 5, 6, and 7**, implementation of the method for testing a device driver that invokes a data exception handler to simulate
20 operation of the target device is shown. The present invention provides a data exception handler that is invoked when a request by application **214** attempts to access to a memory mapped IO address.

25 In **Figure 5**, method **500** for implementing the present invention starts at block **502**. Method **500** moves to block **504** in which operating system **204** allocates a program process space **404**, that includes code space **406** and data space **408**, for executing memory mapped input/output (IO)
30 device driver **208** as application **214**. Method **500** moves to block **506**, which depicts operating system **204** setting

up the data exception handler that is executed and used by operating system 204 when a data exception is taken.

Figure 6 shows that the set up block 506 of **Figure 5** for the data exception handler further comprises more detailed steps in blocks 602 and 604. Block 602 calls operating system 204 to install a data exception handler facility containing the data exception handler into a vector of an interrupt table for operating system 204.

The data exception handler comprises a parser that has a disassembler, which is used for disassembling and identifying an assembler instruction of the request.

Depending on the request, the assembler instruction may be a load/read command, a store/write command, or any other type of instruction. Allocated data space 408 is passed by the data exception handler facility to the vector of the interrupt table for operating system 204.

Block 604 shows that the data exception handler facility is called to register data that is used to determine when a data exception is to be taken (i.e., such as when a target address is requested in which the target address is outside of data space 408). The data include, for example, each of the various target addresses at which a data exception is to be taken, lengths of the target addresses, and user callback routines for the data exception handler calling back to application 214. User callback routines also emulate assembler instructions based on requests by application 214 for device driver 208. The data is stored into a data exception database table.

With reference back to **Figure 5**, method 500 continues at block 508 in which device driver application

214 is executed on top of operating system 204. Method 500 then moves to decision block 510 in which a determination is made as to whether hardware target device 210 is coupled to data processing system 10. If it is determined that hardware target device 210 is coupled to data processing system 10 at decision block 510, method 500 moves to block 512, which depicts hardware target device 210 being accessed and used by application 214. Method 500 then moves to decision block 514, which represents a determination being made as to whether device driver application 214 is finished executing. If application 214 is finished executing at decision block 514, then method 500 ends at block 532 via connector A.

However, if application 214 has not finished executing at decision block 514, then method 500 moves to block 516, which depicts device driver application 214 continuing to execute with use and access of hardware target device 210, and method 500 returns to decision block 510 and continues therefrom. On the other hand, if it is determined at decision block 510 that hardware target device 210 does not exist, method 500 moves to block 518, which depicts operating system monitoring to detect a request issued by application 214. Method 500 moves to decision block 520, which depicts a determination being made as to whether a target address specified by the request is within data space 408. If the target address is not with data space 408, method 500 moves to block 522, which represents the target address

for the request being trapped, and to block 524, which represents a data exception being taken. Method 500 then moves to block 526, which shows the data exception handler intercepting the request and being executed to handle the data exception. The data exception handler emulates hardware target device 210. Method 500 then continues onto decision block 528.

If the determination is made at decision block 520 that the target address is within data space 408, method 500 then continues onto decision block 528. At decision block 528, a determination is made as to whether device driver application 214 has finished executing. If application 214 has not finished executing at decision block 528, then method 500 moves to block 530, which shows device driver application 214 continuing to execute, and method 500 returns to decision block 520 to continue therefrom. However, if application 214 has finished executing at decision block 528, then method 500 ends at block 532.

Figure 7 shows an exemplary data exception handler 1000. Data exception handler 1000 starts at block 1002. Data exception handler 1000 moves to block 1004, which represents exception context data being saved into a memory stack for the request. The data include, for example, the target address for the request, content data relating to the request, and a data address range for the content data. Data exception handler 1000 moves to decision block 1006, which shows a determination being

made by data exception handler 1000 as to whether the target address, which is a memory mapped IO address or data exception address saved into the memory stack, is an address stored in the data exception database table. If the determination is made at decision block 1006 that the target address is not stored in the data exception database table, then method 500 of **Figure 5** for testing device driver 208 is immediately terminated at block 1008. In this situation, method 500 is terminated since device driver application 214 is attempting to access an address that is entirely outside of the accessible address range for device driver 208. Otherwise, data exception handler 1000 continues onto block 1010. At block 1010, data exception handler 1000 disassembles the data for the request into information for a respective user callback routine stored in the data exception database table. The user callback routine that is used is selected on the basis of the request. Data exception handler 1000 passes the disassembled information to the respective user callback routine. The respective user callback routine also emulates a behavior of hardware target device 210. Data exception handler 1000 then moves to block 1012, which shows the content data being copied, as necessary, by the user callback routine from a data space for the callback routine based on the assembler instruction for the request. For example, the copying of the content data is performed when the assembler instruction is a load or read command in order for data exception handler 1000 to emulate the load or read command. Data exception handler 1000 moves onto block 1014, which depicts a next instruction address being set to an address in the memory stack after the currently

saved target address. Data exception handler 1000 then moves onto block 1016, which shows data exception handler 1000 unwinding the memory stack to return control back to application 214. Data exception handler 1000 ends at block 1018.

For example, although aspects of the present invention have been described with respect to a computer system executing software that directs the functions of the present invention, it should be understood that the present invention may alternatively be implemented as a program product for use with a data processing system. Programs defining the functions of the present invention can be delivered to a data processing system via a variety of signal-bearing media, which include, without limitation, non-rewritable storage media (e.g., CD-ROM), rewritable storage media (e.g., a floppy diskette or hard disk drive), and communication media, such as digital and analog networks. It should be understood, therefore, that such signal-bearing media, when carrying or encoding computer readable instructions that direct the functions of the present invention, represent alternative embodiments of the present invention.

While the invention has been particularly shown and described with reference to a preferred embodiment, it will be understood by those skilled in the art that various changes in form and detail may be made therein without departing from the spirit and scope of the invention.

CLAIMS:

What is claimed is:

1 1. A method of testing a device driver on a data
2 processing system, said method comprising:

3 allocating, by an operating system, a data space for
4 executing a device driver;

5 executing the device driver as an application on top
6 of the operating system to test the device driver;

7 monitoring to detect whether a request made by the
8 device driver specifies a target address within the data
9 space; and

10 in response to detecting the target address for the
11 request being made outside of the data space, trapping on
12 the target address for the request and executing a data
13 exception handler that emulates a target device.

1 2. The method according to Claim 1, further comprises:

2 setting up, by the operating system, the data
3 exception handler.

1 3. The method according to Claim 2, wherein the setting
2 up step further comprises:

3 calling the operating system to install a data
4 exception handler facility containing the data exception
5 handler into a vector of an interrupt table for the
6 operating system; and

7 calling the data exception handler facility to
8 register data that is used to determine when the data
9 exception is to be taken wherein the data include each of
10 various target addresses at which the data exception is
11 to be taken, lengths of the target addresses, and user
12 callback routines for calling back to the application
13 into a data exception database table.

14 4. The method according to Claim 3, further comprises:

15 passing, by the data exception handler facility, the
16 data space to the vector of the interrupt table.

17 5. The method according to Claim 4, wherein the data
18 exception handler is a memory mapped input/output (IO)
19 exception handler comprising a parser with a disassembler
20 that is used for disassembling and identifying an
21 assembler instruction of the request.

22 6. The method according to Claim 5, wherein the
23 assembler instruction is identified as a load command.

1 7. The method according to Claim 5, wherein the
2 assembler instruction is identified as a store command.

1 8. The method according to Claim 3, wherein the data
2 exception handler further comprises:

3 saving, into a memory stack, data for the request
4 which includes at least the target address for the
5 request, content data relating to the request, and a data
6 address range for the content data;

7 determining whether the target address that is saved
8 into the memory stack is within the database exception
9 database table;

10 immediately terminating the method of testing if the
11 target address is not within the database exception
12 database table;

13 disassembling the data for the request into
14 disassembled information and passing the disassembled
15 information into a respective one of the user callback
16 routines stored in the data exception database table
17 wherein the respective one of the user callback routines
18 that is used is based on the request and is for emulating
19 a behavior of the target device;

20 emulating, by the respective one of the user
21 callback routines, the behavior of the target device;

22 setting a next instruction address to an address in
23 the memory stack that is after the currently saved target
24 address; and

25 unwinding the memory stack by the data exception

handler to return control back to the application.

9. The method according to Claim 8, further comprising:

copying, as necessary, the content data by the respective one of the user callback routines from another data space for the respective one of the user callback routines based on the request.

10. The method according to Claim 1, wherein the data exception handler is a software emulator of the target device and further comprises:

using a hardware emulator to test the application for the device driver if the hardware emulator is coupled to the data processing system; and

using the software emulator to test the application for the device driver if the hardware emulator is not coupled to the data processing system.

11. The method according to Claim 1, further comprises:

determining whether the application for the device driver has finished executing;

continuing with the executing of the application if the application has not finished executing; and

terminating the method of testing when the application has finished executing.

1 12. A data processing system for testing a device
2 driver, said data processing system comprising:

3 a processor and a memory system, wherein:

4 said processor executes an operating system that
5 allocates a data space for executing applications and
6 executes a device driver as an application on top of the
7 operating system to test the device driver; and

8 said processor and said memory system, responsive to
9 detecting a request by the device driver specifying a
10 target address outside of the data space, trap on the
11 target address and execute a data exception handler that
12 emulates a target device of the device driver.

1 13. The data processing system according to Claim 12,
2 wherein said processor and said memory system call a data
3 exception handler facility to register data that is used
4 to determine when a data exception is to be taken,
5 wherein the data include each of various target addresses
6 at which the data exception is to be taken, lengths of
7 the target addresses, and user callback routines for
8 calling back to the application into a data exception
9 database table.

1 14. The system according to Claim 13, wherein said
2 processor and said memory system call the operating
3 system to install the data exception handler facility
4 containing the data exception handler into a vector of an
5 interrupt table for the operating system.

1 15. The system according to Claim 14, wherein the data
2 exception handler facility passes the data space to the
3 vector of the interrupt table.

1 16. The system according to Claim 15, wherein the data
2 exception handler is a memory mapped input/output (IO)
3 exception handler that is stored in the memory system and
4 comprises a parser with a disassembler that is used for
5 disassembling and identifying an assembler instruction of
6 the request.

1 17. The system according to Claim 16, wherein the
2 assembler instruction is a load command.

1 18. The system according to Claim 16, wherein the
2 assembler instruction is a store command.

1 19. The system according to Claim 14, wherein the data
2 exception handler determines whether the target address

3 is within the data exception database table and,
4 responsive to said determination, immediately terminates
5 testing of the device driver if the target address is not
6 within the data exception database table, and, emulates,
7 by the respective one of the user callback routines, the
8 behavior of the target device if the target address is
9 within the data exception database table.

1 20. The system according to Claim 19, wherein the data
2 exception handler further:

3
4 copies, as necessary, the content data by the
5 respective one of the user callback routines from another
6 data space for the respective one of the user callback
7 routines based on the request.

1 21. The system according to Claim 12, wherein the data
2 exception handler is a software emulator of the target
3 device and wherein:

4 a hardware emulator is used to test the application
5 for the device driver if the hardware emulator is coupled
6 to the data processing system; and
7

8 the software emulator is used to test the
9 application for the device driver if the hardware
10 emulator is not coupled to the data processing system.

1 22. A program product for testing a device driver on a
2 data processing system comprising:

3 instruction means for allocating, by an operating
4 system, a data space for executing a device driver;

5 instruction means for executing the device driver as
6 an application on top of the operating system to test the
7 device driver;

8 instruction means for monitoring to detect whether a
9 request made by the device driver specifies a target
10 address within the data space;

11 in response to detecting the target address for the
12 request being made outside of the data space, instruction
13 means for trapping on the target address for the request
14 and executing a data exception handler that emulates a
15 target device; and

16 computer usable media bearing said instruction
17 means.

1 23. The program product according to Claim 22, further
2 comprises:

3 instruction means for setting up, by the operating
4 system, the data exception handler.

1 24. The program product according to Claim 23, wherein
2 the instruction means for setting up further comprises:

3 instruction means for calling the operating system
4 to install a data exception handler facility containing
5 the data exception handler into a vector of an interrupt
6 table for the operating system; and

7 instruction means for calling the data exception
8 handler facility to register data that is used to
9 determine when the data exception is to be taken wherein
10 the data include each of various target addresses at
11 which the data exception is to be taken, lengths of the
12 target addresses, and user callback routines for calling
13 back to the application into a data exception database
14 table.

1 25. The program product according to Claim 24, further
2 comprises:

3 instruction means for passing, by the data exception
4 handler facility, the data space to the vector of the
5 interrupt table.
6

1 26. The program product according to Claim 22, wherein
2 the data exception handler further comprises:

3 instruction means for saving, into a memory stack,

4 data for the request which includes at least the target
5 address for the request, content data relating to the
6 request, and a data address range for the content data;

7 instruction means for determining whether the target
8 address that is saved into the memory stack is within the
9 database exception database table;

10 instruction means for immediately terminating the
11 testing of the device driver if the target address is not
12 within the database exception database table;

13 instruction means for disassembling the data for the
14 request into disassembled information and passing the
15 disassembled information into a respective one of the
16 user callback routines stored in the data exception
17 database table wherein the respective one of the user
18 callback routines that is used is based on the request
19 and is for emulating a behavior of the target device;

20 instruction means for emulating, by the respective
21 one of the user callback routines, the behavior of the
22 target device;

23 instruction means for setting a next instruction
24 address to an address in the memory stack that is after
25 the currently saved target address; and

26 instruction means for unwinding the memory stack by
27 the data exception handler to return control back to the
28 application.

1 27. The program product according to Claim 26, further
2 comprising:

instruction means for copying, as necessary, the content data by the respective one of the user callback routines from another data space for the respective one of the user callback routines based on the request.

28. The program product according to Claim 22, wherein the data exception handler is a software emulator of the target device and further comprises:

instruction means for using a hardware emulator to test the application for the device driver if the hardware emulator is coupled to the data processing system; and

instruction means for using the software emulator to test the application for the device driver if the hardware emulator is not coupled to the data processing system.

29. The program product according to Claim 22, further comprises:

instruction means for determining whether the application for the device driver has finished executing;

instruction means for continuing with the executing of the application if the application has not finished executing; and

instruction means for terminating the testing of the device driver when the application has finished executing.

ABSTRACT OF THE DISCLOSURE
METHOD AND DATA PROCESSING SYSTEM FOR SOFTWARE TESTING OF
A DEVICE DRIVER

5 A system and method are disclosed for testing a
device driver on a data processing system. An operating
system allocates a memory address range for executing a
device driver. The device driver is executed as an
application on top of the operating system to test the
10 device driver. The system and method monitor to detect
whether a target address for a request made by the device
driver is within the memory address range. In response to
detecting the target address for the request being made
outside of the memory address range, the target address is
trapped, and a data exception handler is executed to
emulate a target device.

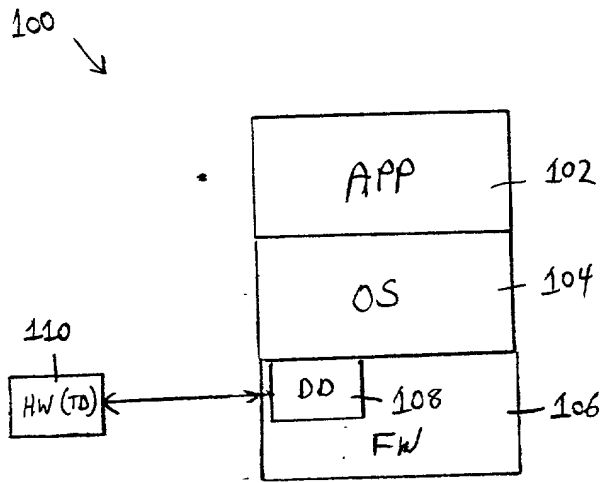


Figure 1 (Prior Art)

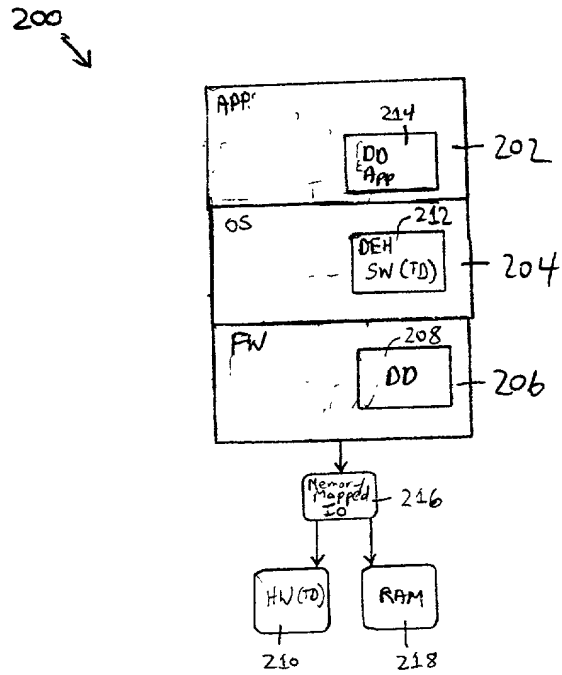


Figure 3

FIG. 1 is a block diagram of a computer system 10.

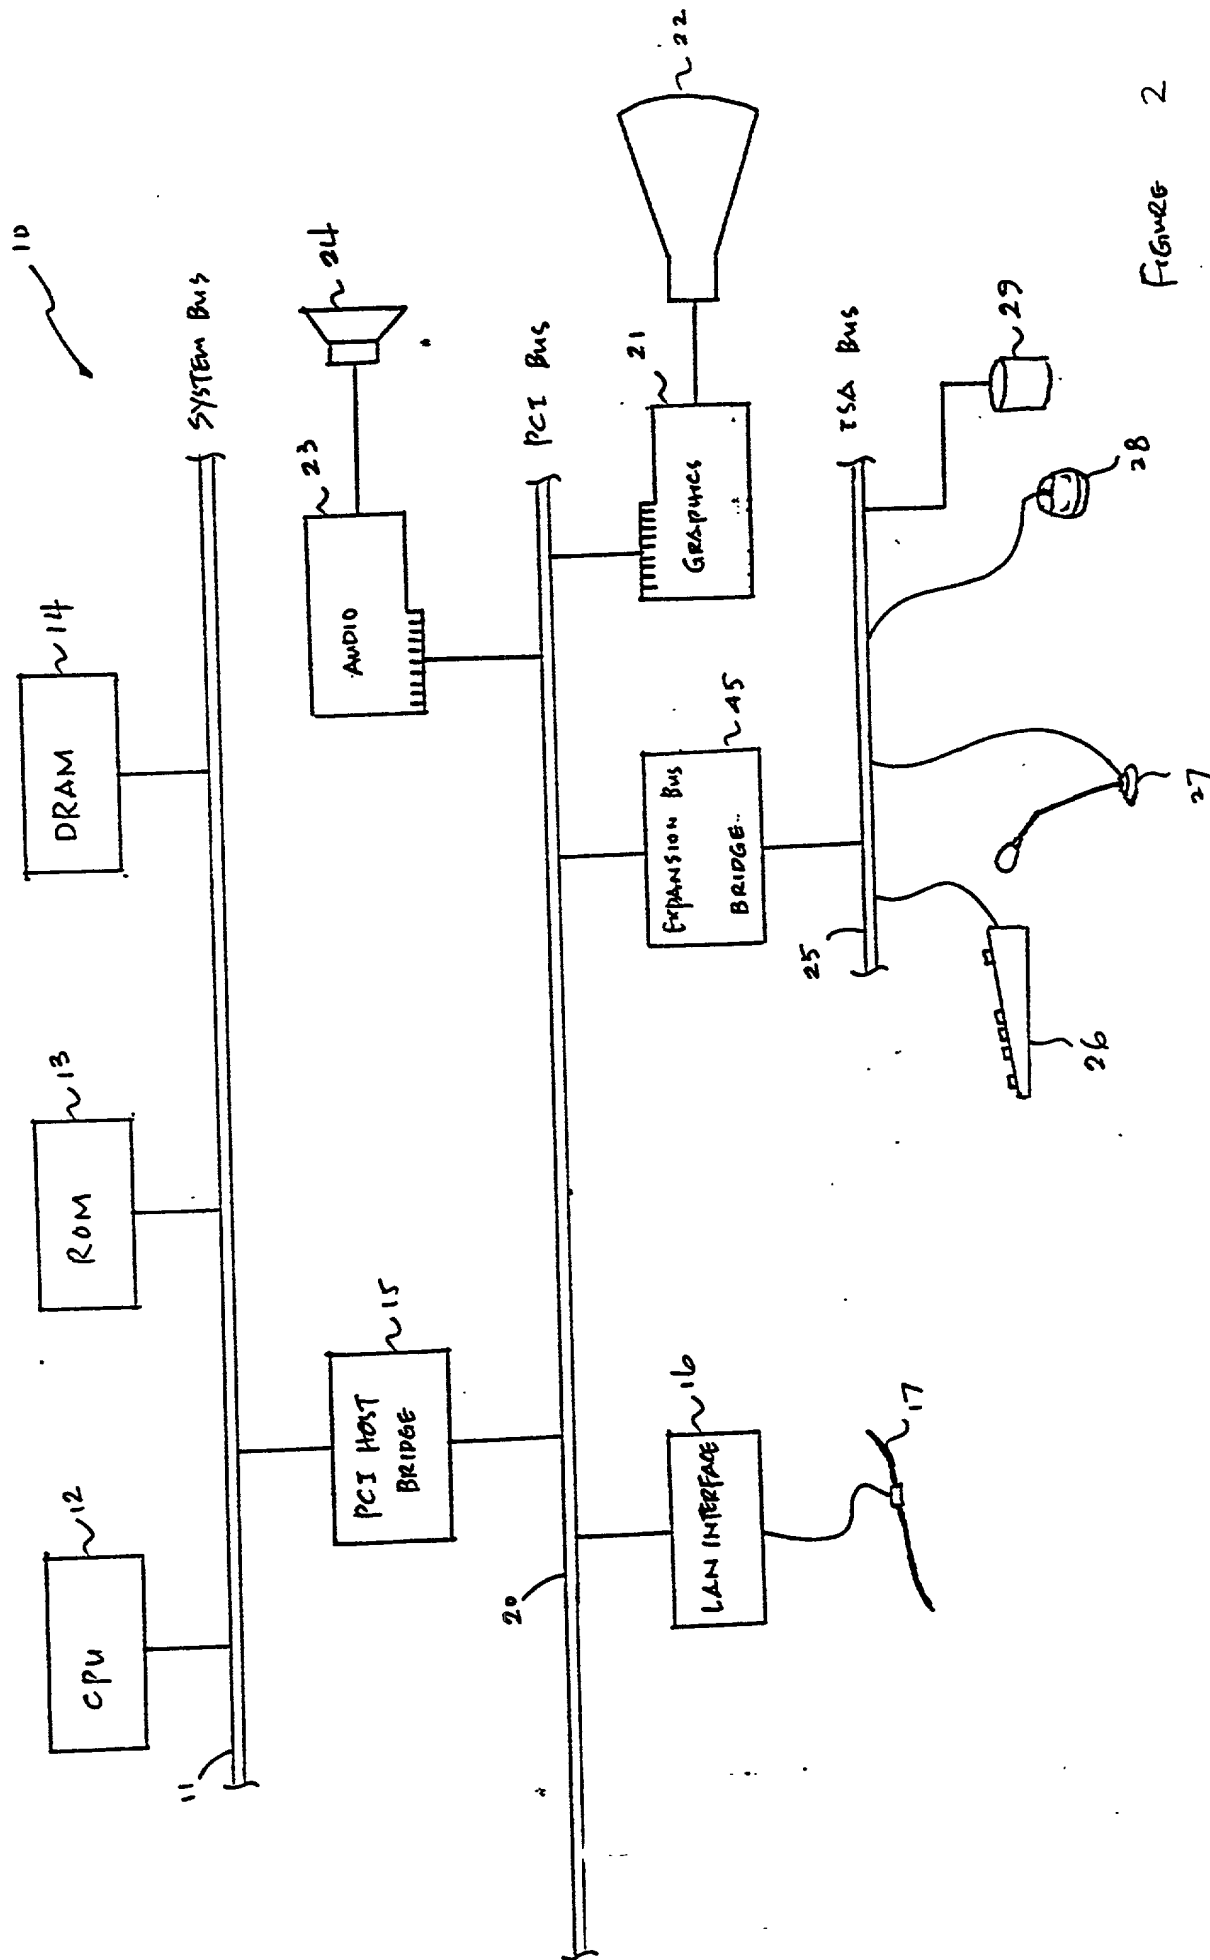


FIGURE 2

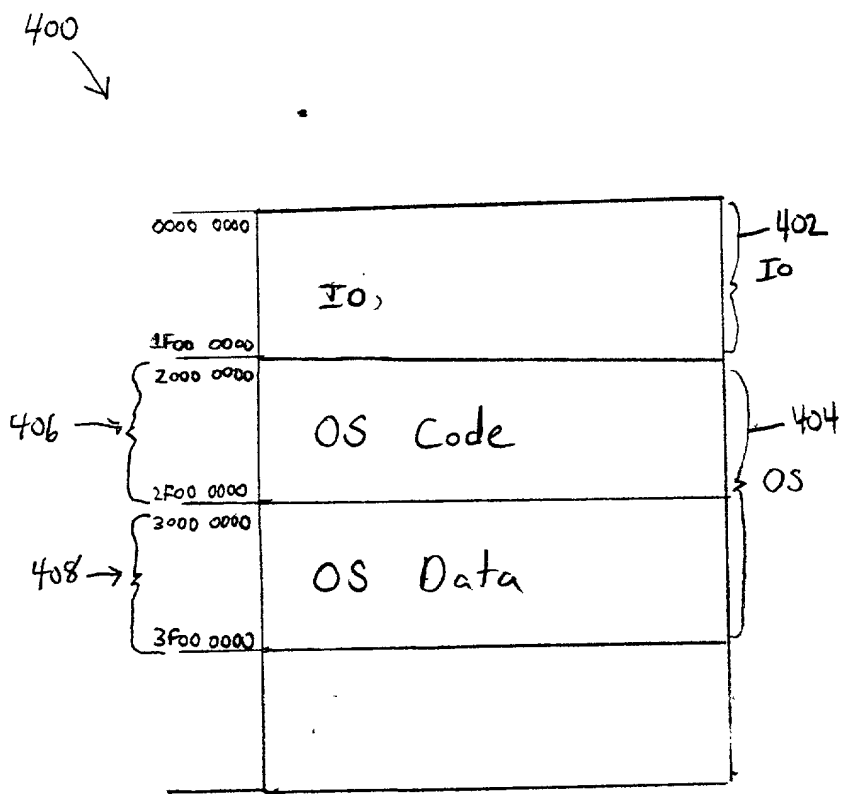


Figure 4

500

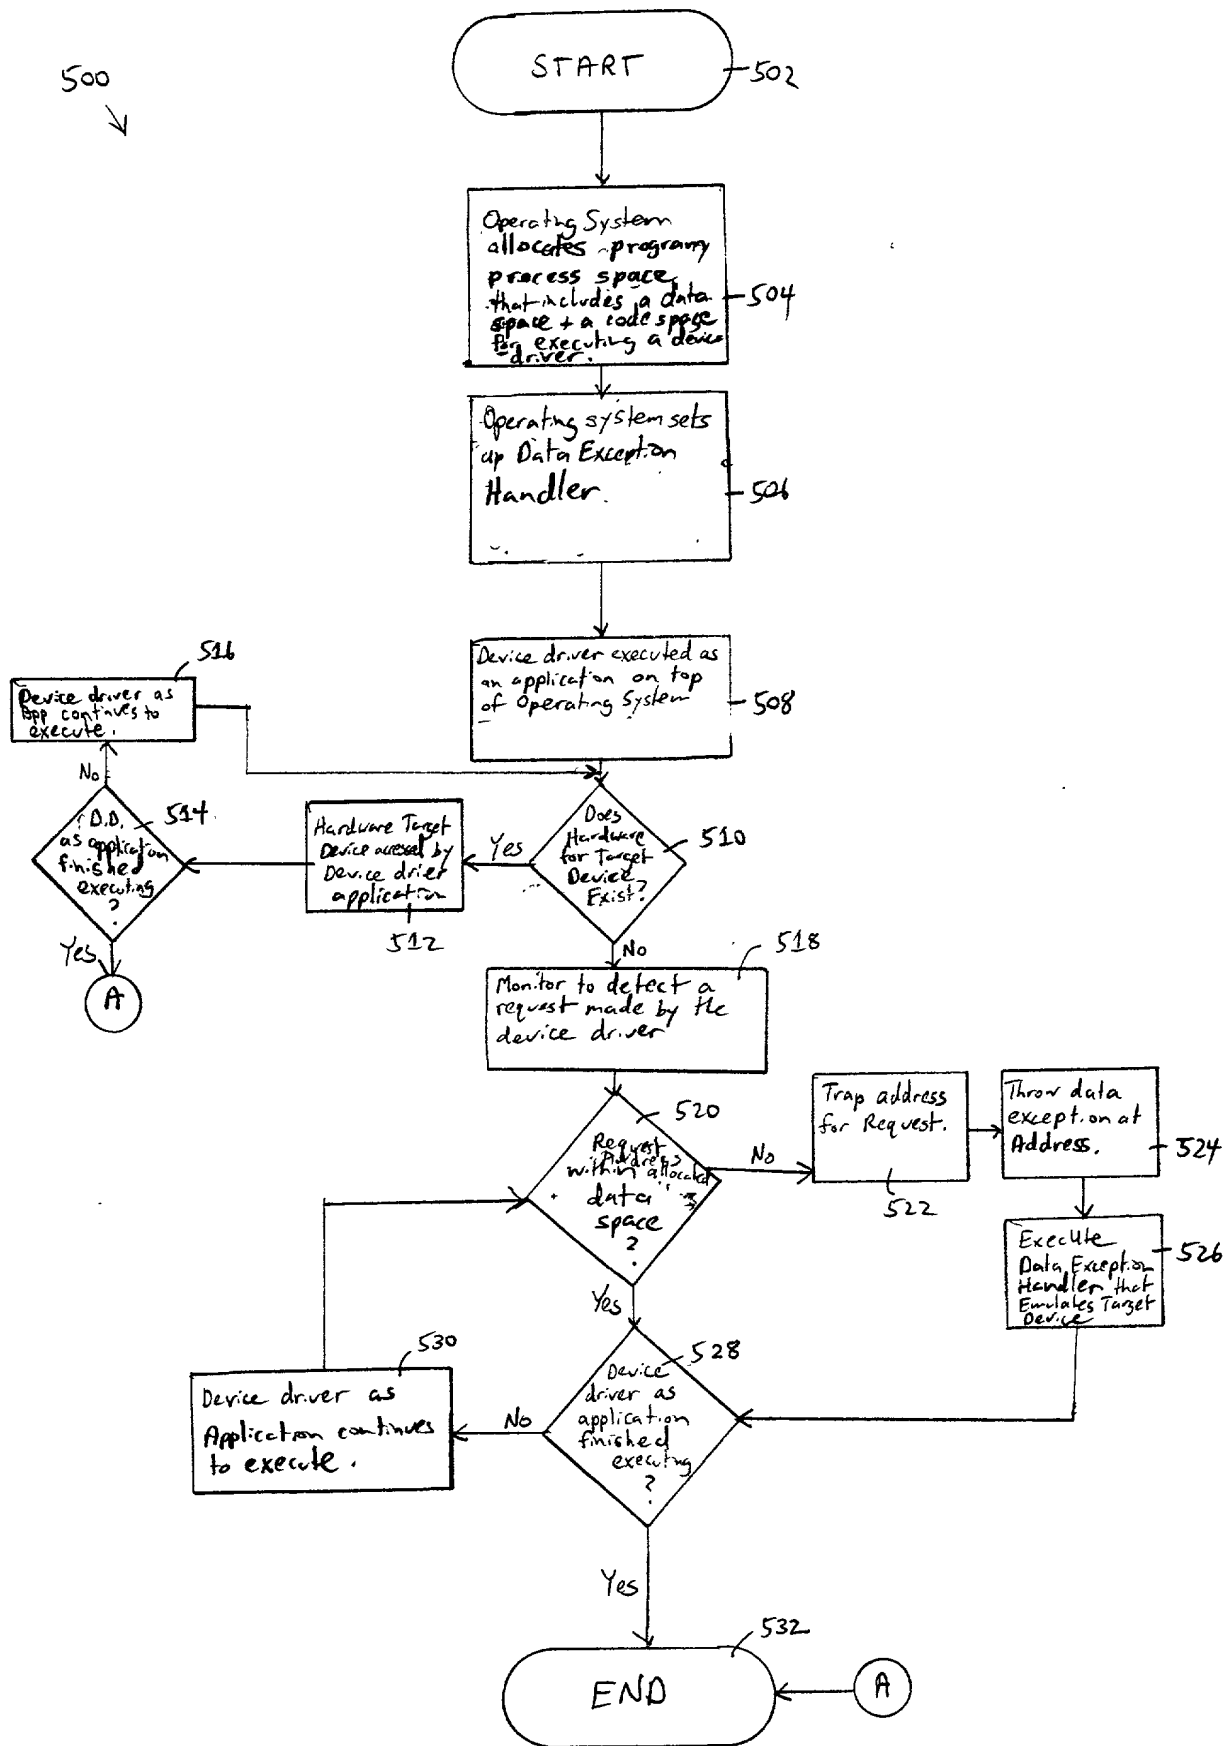


Figure 5

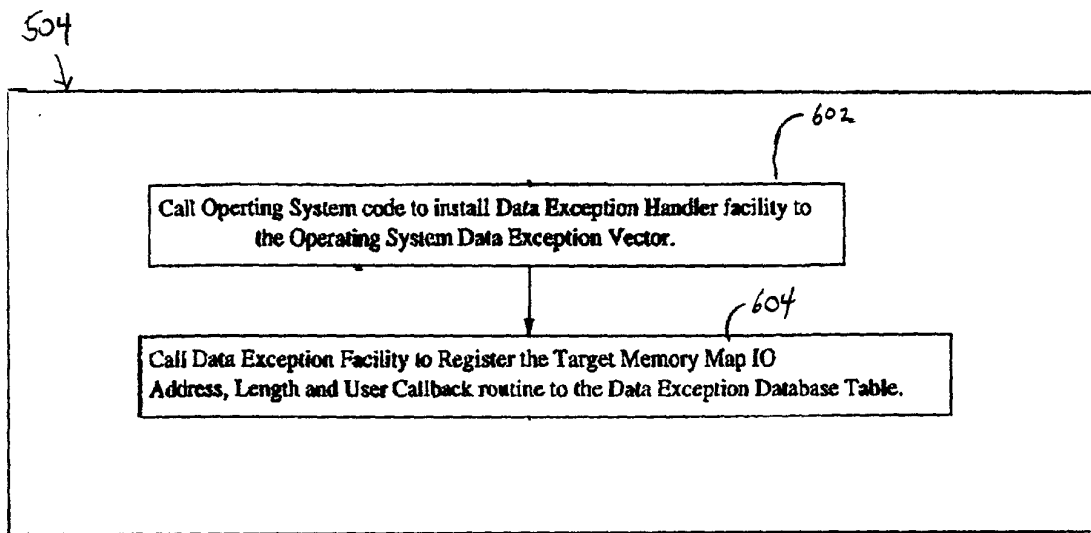


Figure 6

1000

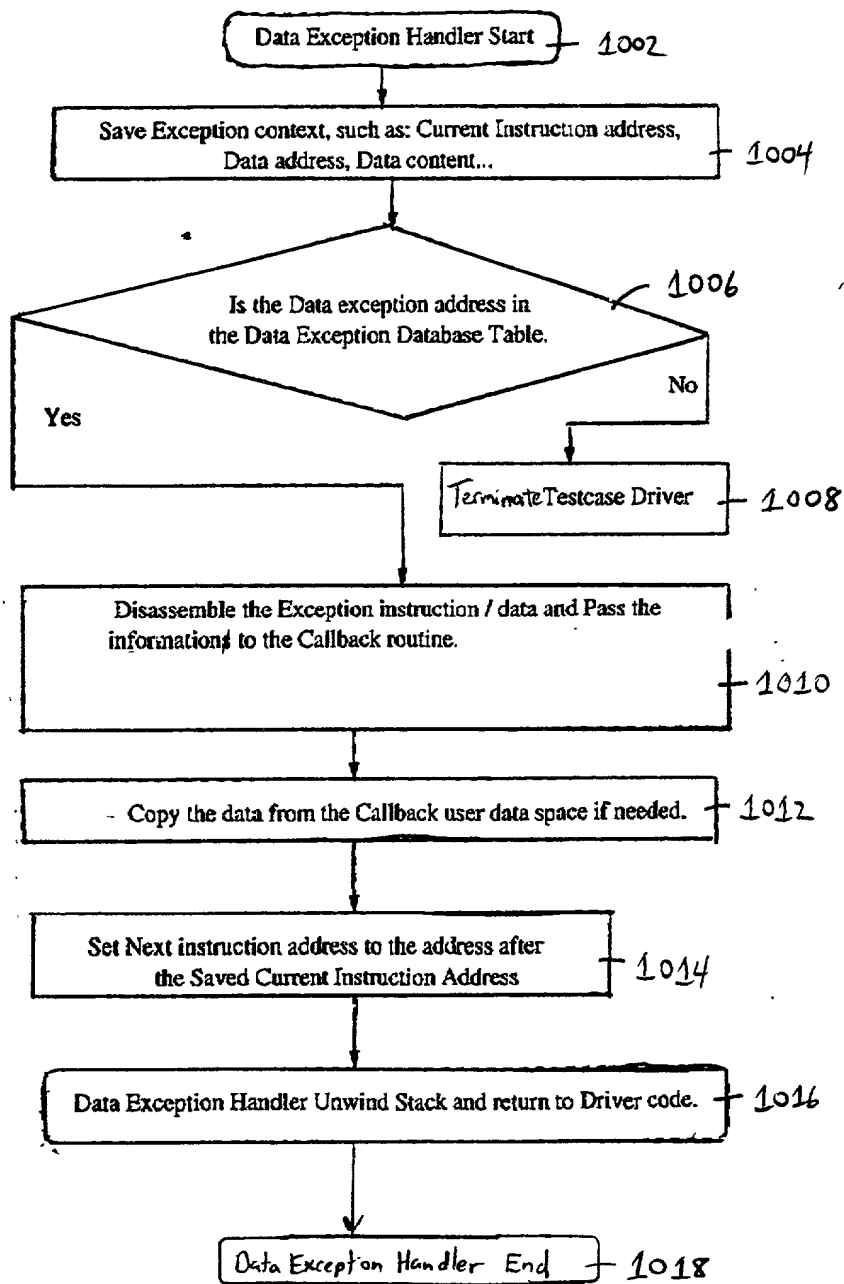


Figure 7

DECLARATION AND POWER OF ATTORNEY FOR
PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

METHOD AND DATA PROCESSING SYSTEM FOR SOFTWARE TESTING OF A DEVICE DRIVER

the specification of which (check one)

☒ is attached hereto.

___ was filed on _____
as Application Serial No. _____
and was amended on _____
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s):	Priority Claimed
_____	___ Yes___ No
(Number)	(Country) (Day/Month/Year)

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information material to the patentability of this application as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior

application and the national or PCT international filing date of this application:

(Application Serial #)

(Filing Date)

(Status)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Owen J. Gamon, Reg. No. 36,143; Pryor A. Garnett, Reg. No. 32,136; Steven W. Roth, Reg. No. 34,712; James R. Nock, Reg. No. 42,937; Christopher A. Hughes, Reg. No. 26,914; Edward A. Pennington, Reg. No. 32,588; John E. Hoel, Reg. No. 26,279; Joseph C. Redmond, Jr., Reg. No. 18,753; Andrew J. Dillon, Reg. No. 29,634; Max Ciccarelli, Reg. No. 39,454; Daniel E. Venglarik, Reg. No. 39,409; Jack V. Musgrove, Reg. No. 31,986; Brian F. Russell, Reg. No. 40,796; Steven Lin, Reg. No. 35,250; Matthew W. Baca, Reg. No. 42,277; Antony P. Ng, Reg. No. 43,427; John G. Graham, Reg. No. 19,563; Matthew S. Anderson, Reg. No. 39,093; Michael R. Barre, Reg. No. 44,023; Andrew Mitchell Harris, Reg. No. 42,638; Richard McCain, Reg. No. 43,785; Michael Noe, Reg. No. 44,975; and Sidney L. Weatherford, Reg. No. P-45,602.

Send correspondence to: Andrew J. Dillon, FELSMAN, BRADLEY, VADEN, GUNTER & DILLON, LLP, Suite 350 Lakewood on the Park, 7600B North Capital of Texas Highway, Austin, Texas 78731, and direct all telephone calls to Andrew J. Dillon, (512) 343-6116.

FULL NAME OF SOLE OR FIRST INVENTOR: Thomas Hung Tran

INVENTORS SIGNATURE: Thomas H. Tran DATE: 03-06-2000

RESIDENCE: 5115 23rd Avenue N.W.
Rochester, Minnesota 55901

CITIZENSHIP: U.S.A.

POST OFFICE ADDRESS: 5115 23rd Avenue N.W.
Rochester, Minnesota 55901